


EXTREME ROOF PANEL

2x WEDGE - EACH LAYER FASTENED TOGETHER W/ PANEL SEALANT & 3" CONST. LAGS @ 24" O.C. IN 2 ROWS STAGGERED IN FIELD (U.N.O.)

PANEL SCREWS W/ WASHERS @ 12" O.C. W/ MINIMUM 1/4" PENETRATION INTO TOP PLATE MATERIAL (U.N.O.)

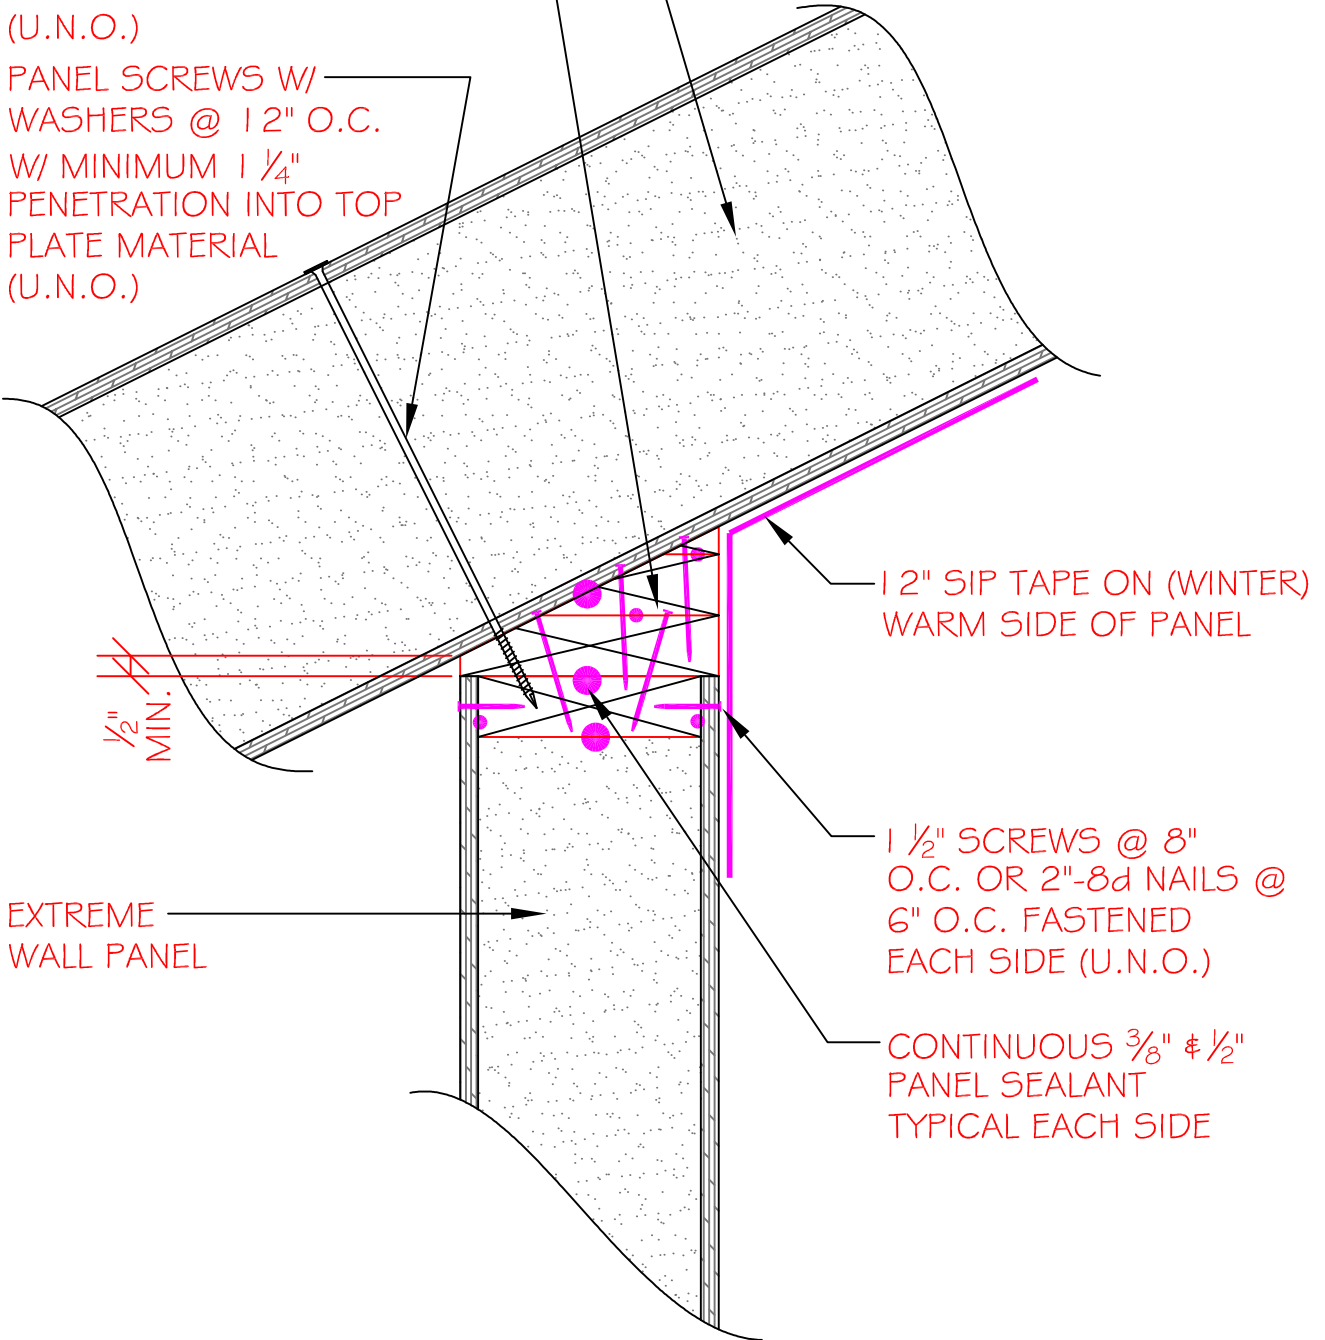

1/2" MIN.

1 2" SIP TAPE ON (WINTER) WARM SIDE OF PANEL

1 1/2" SCREWS @ 8" O.C. OR 2"-8d NAILS @ 6" O.C. FASTENED EACH SIDE (U.N.O.)

CONTINUOUS 3/8" & 1/2" PANEL SEALANT TYPICAL EACH SIDE

EXTREME WALL PANEL

NOTE: 2x WEDGE ONLY USED UP THROUGH 6:12 ROOF PITCHES

SECTION NOT TO SCALE

DETAIL TITLE : BUILT-UP 2x WEDGE

DETAIL NO. : EP-401

PAGE NO. : 4 - 1

UPDATED : MARCH 2017

**Extreme Panel**

TECHNOLOGIES, INC.

STRUCTURAL INSULATED PANELS