


EXTREME
FLOOR PANELS

#8x1/2" SCREWS @ 8" O.C.
OR 8d NAILS @ 6" O.C.
FASTENED ON EACH SIDE
(U.N.O.)

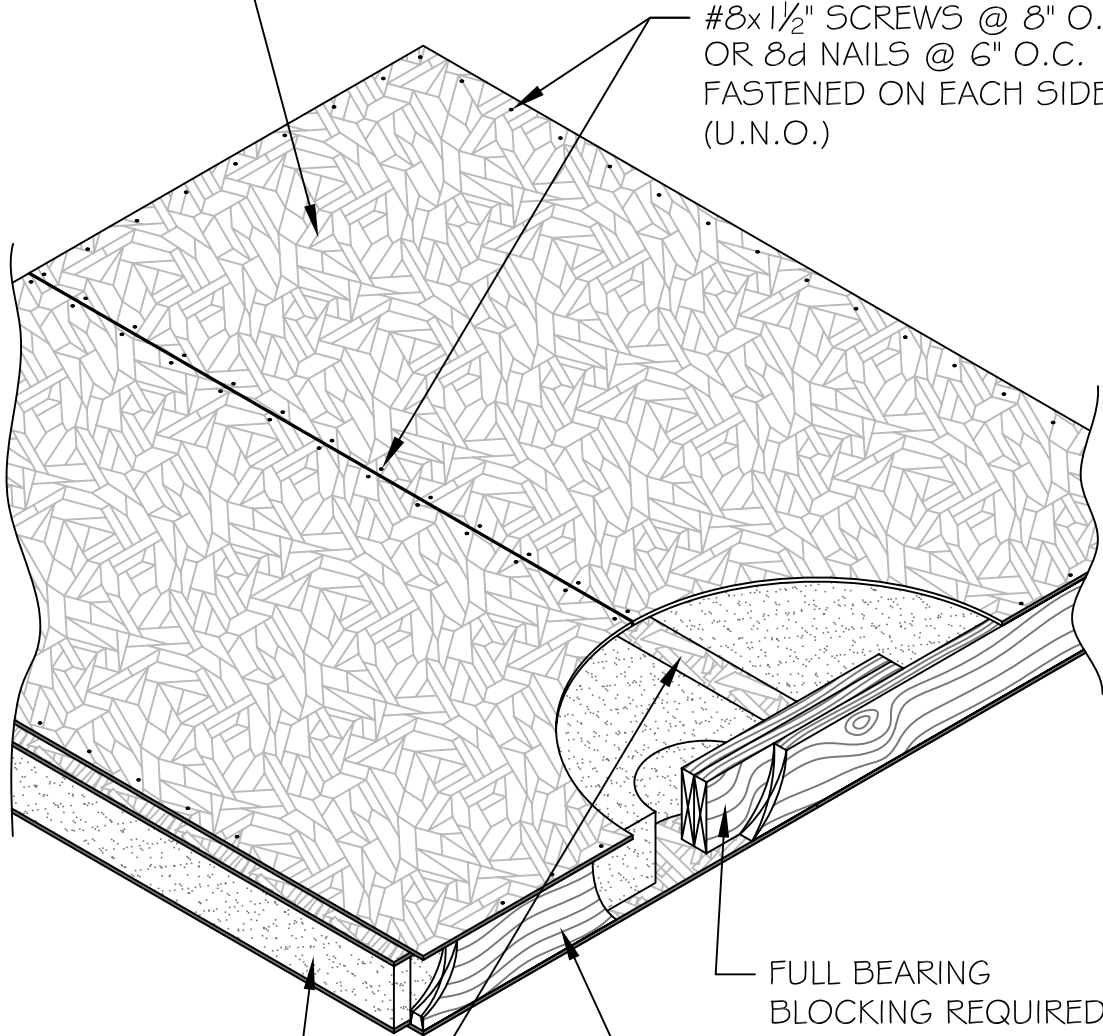

FULL BEARING
BLOCKING REQUIRED
UNDER POINT LOADS
(SEE DETAIL EP-209)

ANCHOR BOLTS
PLACED PER CODE

CONTINUOUS RIM
BETWEEN SUPPORT
MEMBERS

SECTION
NOT TO SCALE

* DETAIL COURTESY OF PREMIER BUILDING SYSTEMS

DETAIL TITLE : PANEL FLOOR BLOCKING

DETAIL NO. : EP-210

PAGE NO. : 2 - 10

UPDATED : 2/5/2009

Extreme Panel
Technologies, Inc.
QUALITY EFFICIENT BUILDING SYSTEMS