


2x LUMBER IN END
OF ROOF PANEL

FIELD INSTALLED EPS
FOAM RIDGE CAP

PANEL SCREWS W/
WASHERS @ 12" O.C.
W/ MINIMUM 1 1/4"
PENETRATION INTO
STRUCTURAL
SUPPORT (U.N.O.)

CONTINUOUS 3/8" # 1/2"
PANEL SEALANT
TYPICAL EACH SIDE

1 1/2" SCREWS @ 8" O.C.
OR 2"-8d NAILS @ 6" O.C.
FASTENED EACH SIDE

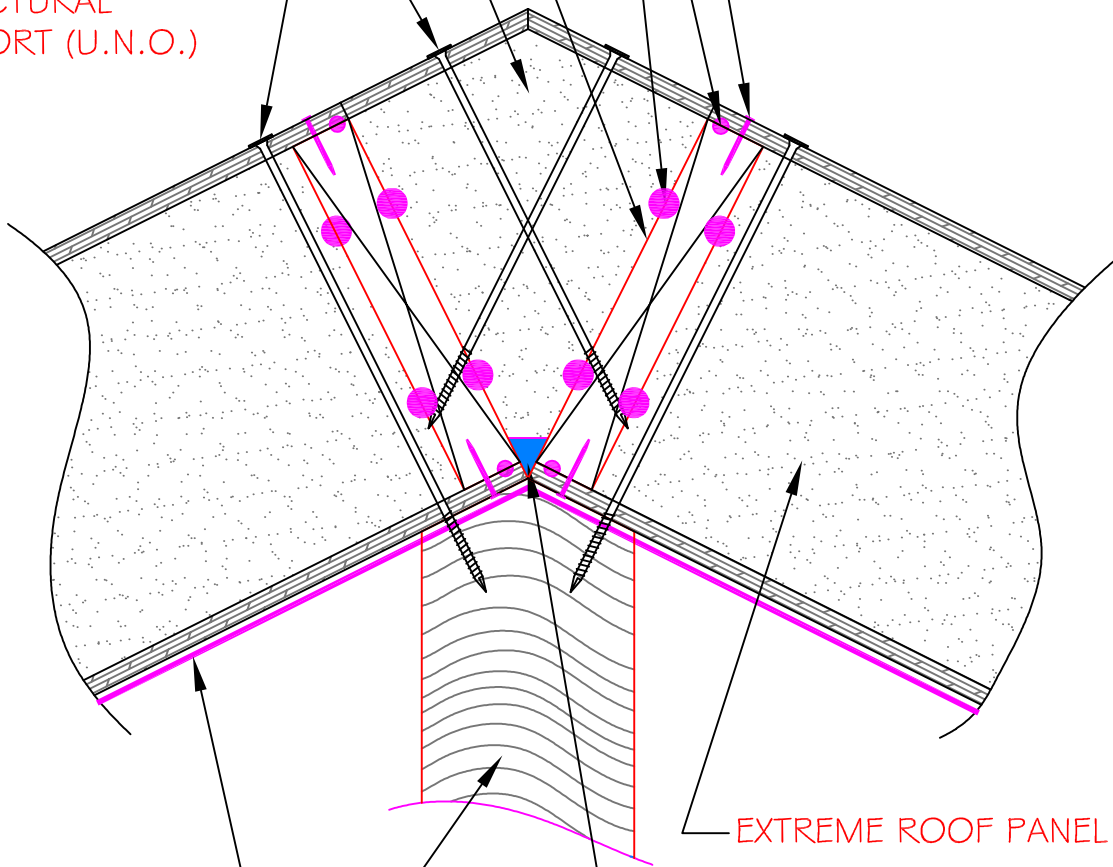

EXTREME ROOF PANEL

SINGLE PART EXPANDABLE
FOAM OR PANEL SEALANT

STRUCTURAL SUPPORT MINIMUM 3" WIDE
FOR MINIMUM 1 1/2" BEARING FOR PANEL
ON EACH SIDE

18" SIP TAPE ON (WINTER)
WARM SIDE OF PANEL

SECTION
NOT TO SCALE

DETAIL TITLE : ROOF WEDGE DETAIL

DETAIL NO. : EP-406

PAGE NO. : 4 - 6

UPDATED : MARCH 2017

Extreme Panel

TECHNOLOGIES, INC.

STRUCTURAL INSULATED PANELS