


EXTREME ROOF PANEL

PANEL SCREWS W/  
WASHERS @ 12" O.C.  
W/ MINIMUM 1 1/4"  
PENETRATION INTO  
STRUCTURAL SUPPORT  
(U.N.O.)

CONTINUOUS 1/2"  
PANEL SEALANT OR  
FILL GAPS WITH  
2-PART EXPANDABLE  
FOAM AT FOAM JOINT

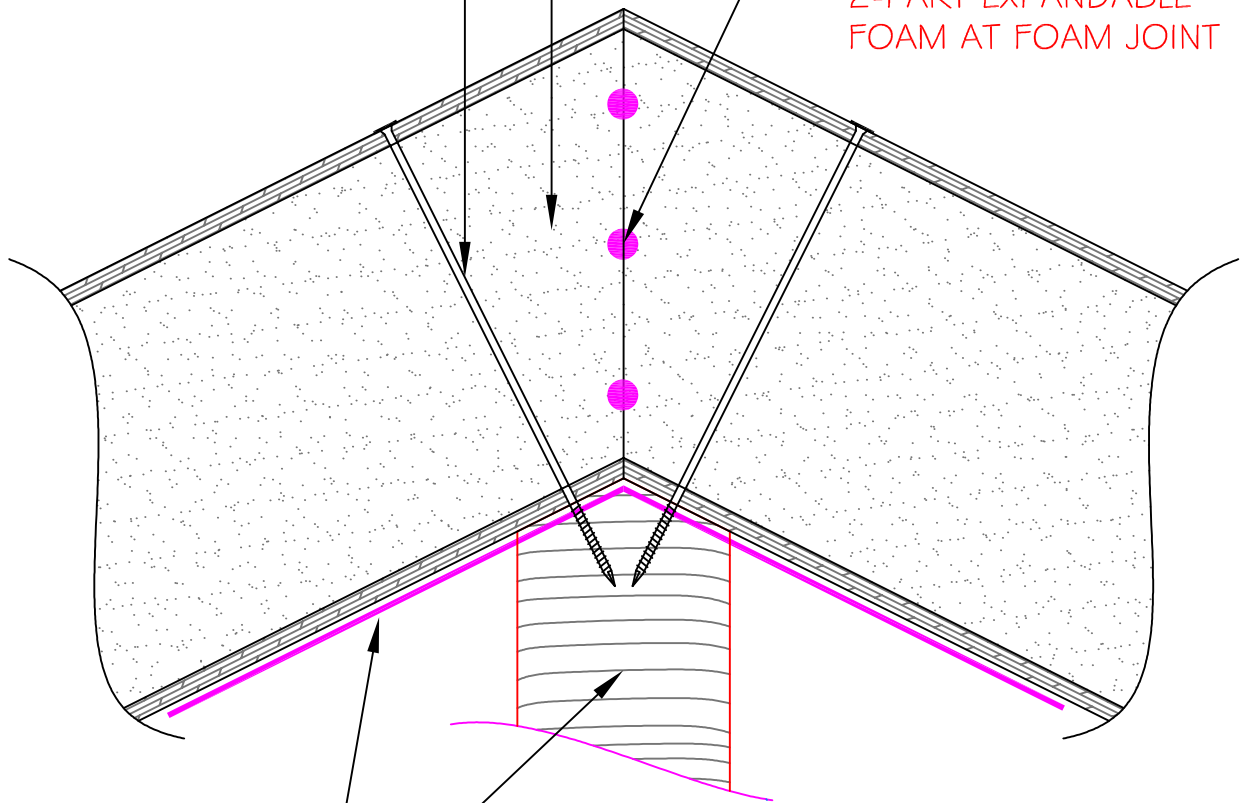

STRUCTURAL SUPPORT MINIMUM 3" WIDE  
FOR MINIMUM 1 1/2" BEARING FOR PANEL  
ON EACH SIDE

18" SIP TAPE ON (WINTER)  
WARM SIDE OF PANEL

SECTION  
NOT TO SCALE

DETAIL TITLE : ROOF HIP (FLUSH FOAM)

DETAIL NO. : EP-412

PAGE NO. : 4 - 12

UPDATED : MARCH 2017

**Extreme Panel**

TECHNOLOGIES, INC.

STRUCTURAL INSULATED PANELS