


NOTES:

1. STANDARD HORIZONTAL ELECTRICAL CHASES ARE PROVIDED AT 14" AND 42" FROM BOTTOM OF SIP AND ROUGHLY 48" O.C. VERTICALLY UNLESS PRIOR ARRANGEMENTS HAVE BEEN MADE BEFORE SIP MANUFACTURING.
2. A VERTICAL CHASE 8" FROM EACH SIDE OF DOOR OPENING IS PROVIDED WHERE ALLOWABLE.
3. ADDITIONAL CUSTOMER SPECIFIED ELECTRICAL CHASES MUST BE PRE-ARRANGED WITH SIP SHOP DRAWING APPROVAL.
4. SIP INSTALLER SHALL PROVIDE FIELD DRILLED HOLES IN TOP PLATES, SILL / BASE PLATES, VERTICAL PLATES, AND THROUGH FLOOR TO ACCESS ELECTRICAL CHASES.
5. FOLLOW LOCAL CODE REQUIREMENTS FOR ELECTRICAL INSTALLATION.
6. ALL PENETRATIONS ARE REQUIRED TO BE FOAMED IN PLACE AFTER ELECTRICAL ROUGH IN IS COMPLETE.

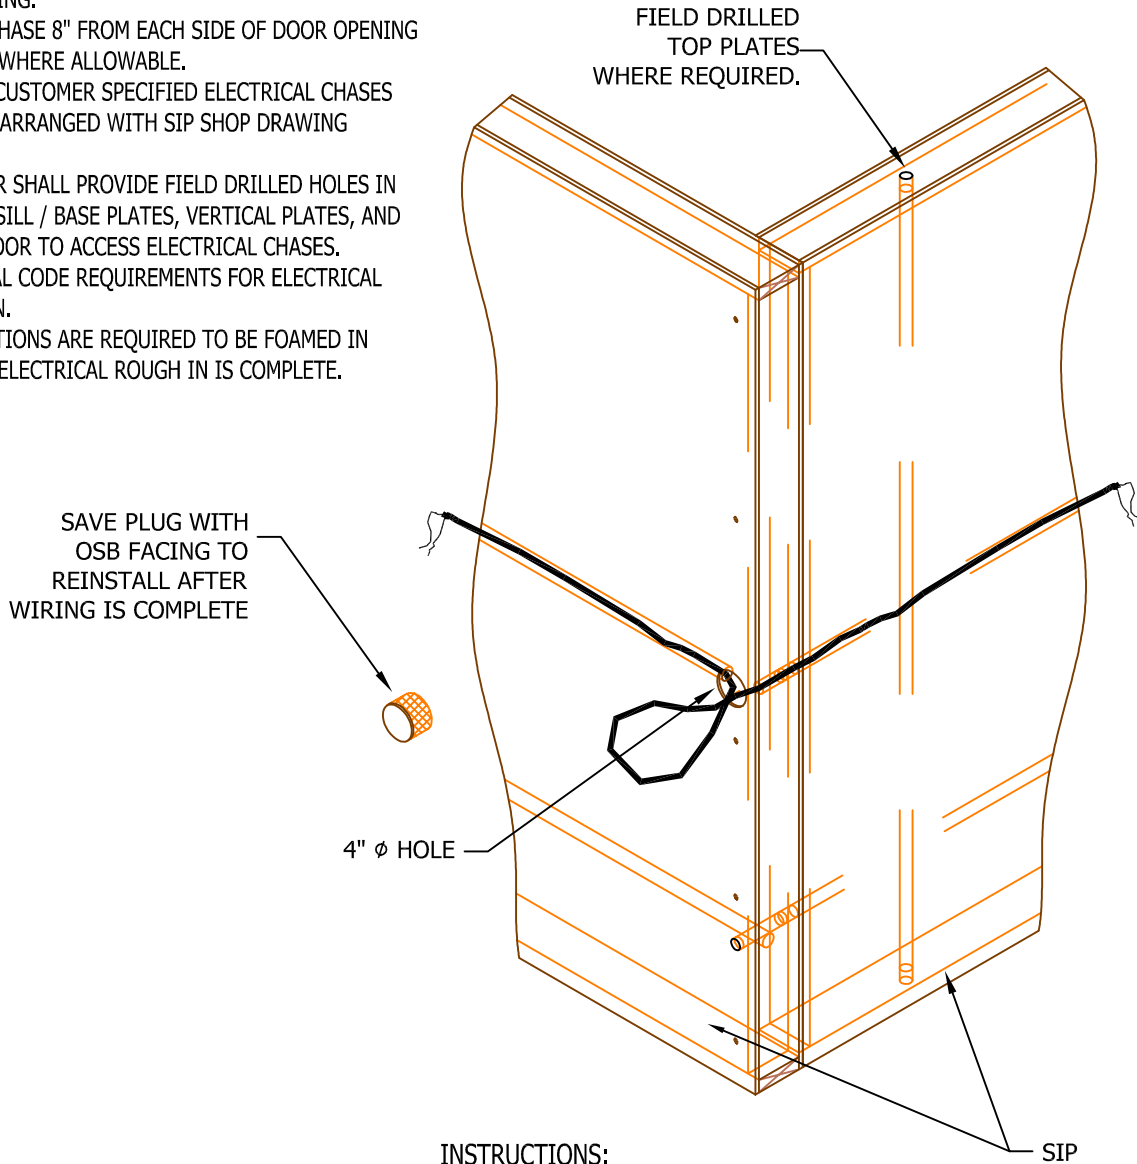

INSTRUCTIONS:

1. CUT HOLE IN CORNER WITH HOLE SAW TO ACCESS CHASES AT INTERSECTION.
2. PUSH WIRE TO CORNER HOLE.
3. PULL THE REQUIRED AMOUNT OF WIRE THROUGH THE CREATED CORNER HOLE.
4. PUSH THE WIRE THROUGH ADJACENT HOLE TO NEXT NEEDED INTERSECTION OR BOX.

N.T.S.

Rev: 12/10/2021

EPT-107

WALL ELECTRICAL CHASES
CORNER ROUTED THROUGH EXTERIOR

