



OPTION F:

SIP SCREWS W/WASHER
PER EPT-100D W/ 1" MIN
PENETRATION INTO
BLOCKING U.N.O.

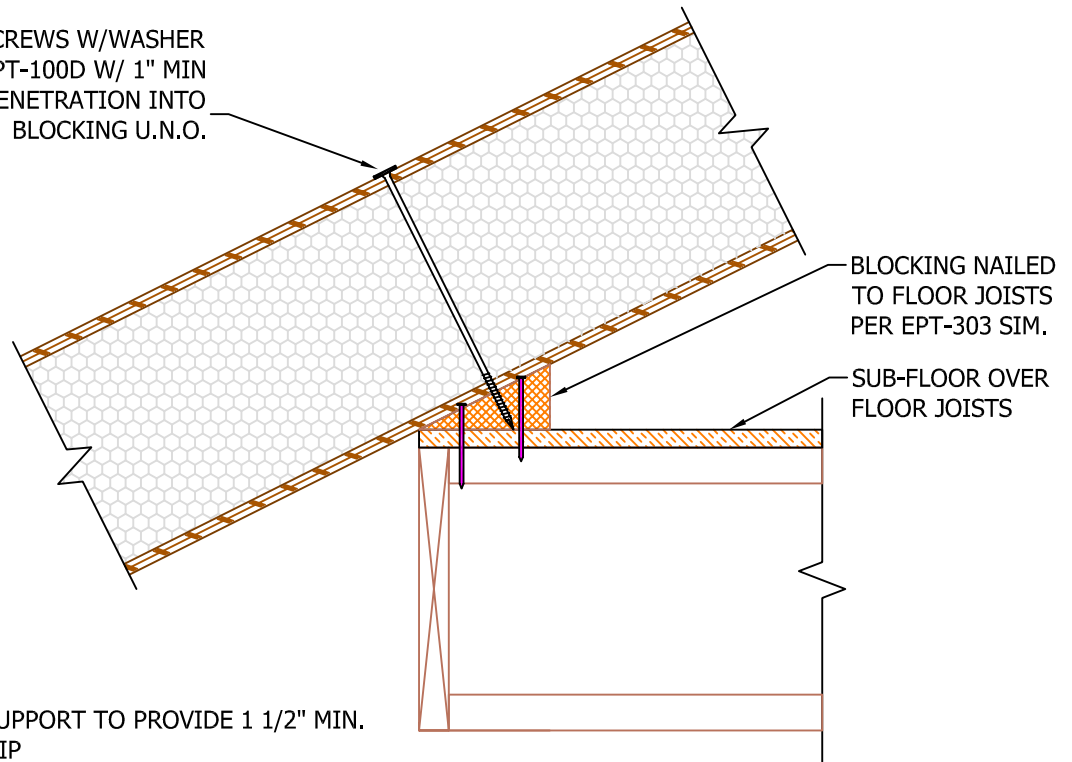

OPTION G:

SIP SCREWS W/WASHER
PER EPT-100D W/ 1" MIN
PENETRATION INTO
PLATE. U.N.O.

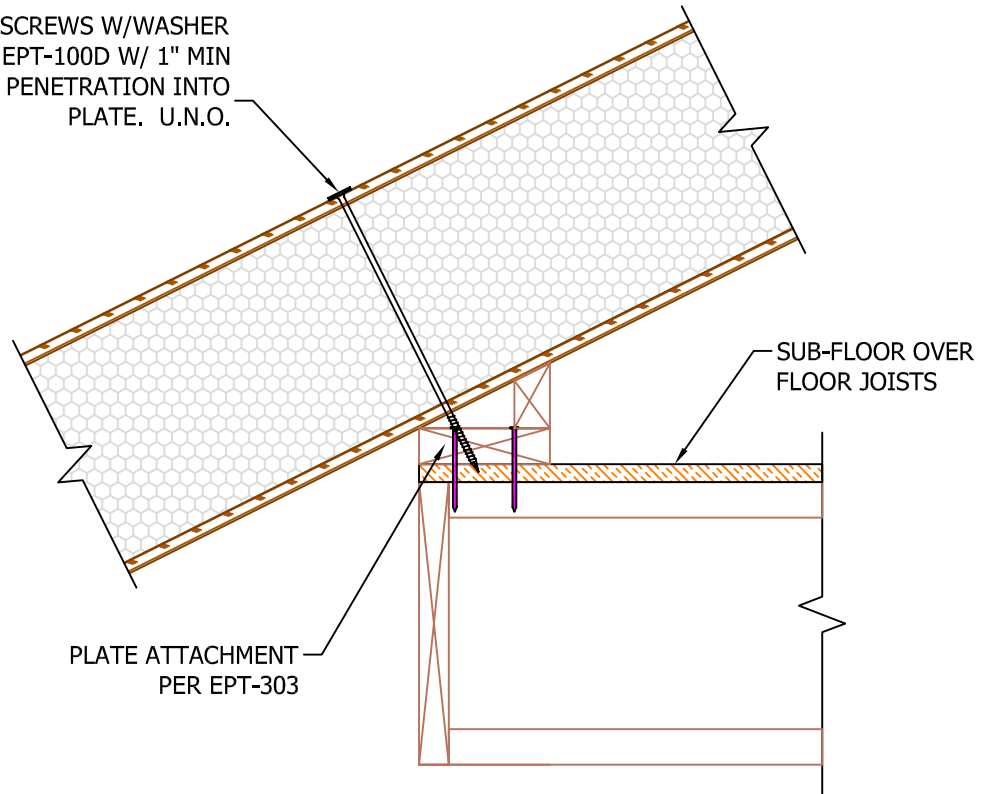

N.T.S.

STRUCTURAL SUPPORT TO PROVIDE 1 1/2" MIN.
BEARING FOR SIP

Rev: 9/23/2022

EPT-600F-G

SIP BEARING CONDITIONS
CONTINUOUS SIP

